




FPN 10-10000-1A

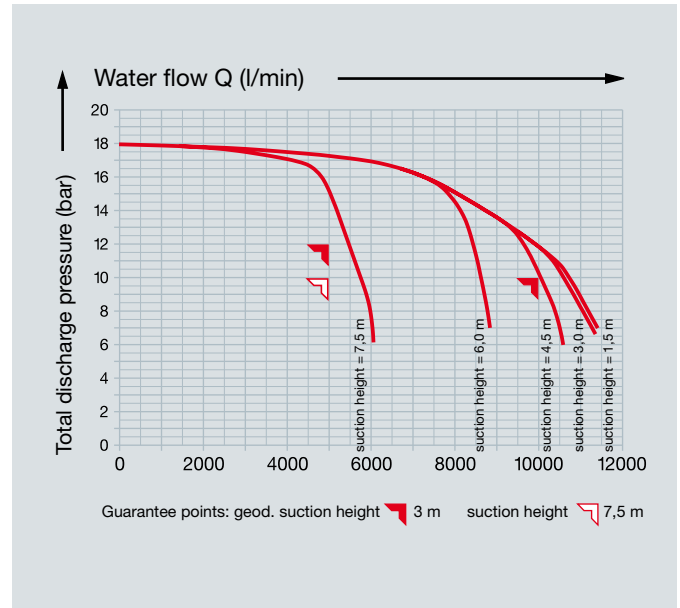

FPN 10-10000-1A

Pump type	Art. no.	Engine	Pump output max. at 10 bar Hs 3,0 m l/min	Weight approx. kg	Dimensions approx. LxWxH mm
FPN 10-10000-1	1061793	Deutz industrial Diesel engine type TCD 2015 V06 engine with 6 cylinders in line turbo-charged and charge-cooled water-cooled, 360 kW (490 HP) electric starter battery 12 V/140 Ah generator 28 V/55 A fuel tank approx. 200 l	10500	2950	3400x1200x2040

Basic equipment

1stage centrifugal fire pump,
3 suction inlets Storz F (DN 150),
delivery outlets on customer request in sizes up to DN 125, lockable,
with intermediate flaps or ball cocks, suction and delivery outlets with
blank cap.

Priming system: fully automatic TROKOMAT PLUS with cover

Auxiliary equipment and systems

on request, additionally charged:
suction inlets on customer request, automatic pressure governor
(TOURMAT), tandem platform trailer acc. to art. no. 229258.

Gauges and controls

Pressure gauge and mano-vacuummeter.
All instruments and switches for engine operation and control
are integrated in an instrument box.

Pump drive

via joint shaft and elastic coupling

Paintwork

basic frame black
pump silver coloured RAL 9006
cover red RAL 3000